

Dow Corning[®] CB-3046 Fluid

FEATURES & BENEFITS

- Suitable for water based and anhydrous formulations
- Clear formulations possible
- Cold processing
- Listed in the Catalogue of Cosmetics Ingredients Used in China
- Typical D4 and D5 content is <0.1%
- Superior frizz control
- Long lasting frizz control
- Ability to maintain style
- Curl definition
- Shine
- Heat protection
- Enhanced hair alignment
- Natural look and feel
- Suitable for different hair types

COMPOSITION

- Silicone fluid blend

Superior frizz control with improved style ability

INCI name: Dimethicone and Phenyl Trimethicone and Trimethylsiloxysilicate and Dimethiconol

APPLICATIONS

- Leave-in hair products including creams, lotions, cuticle coats, pomades and non-aerosol sprays.

TYPICAL PROPERTIES

Specification Writers: These values are not intended for use in preparing specifications. Please contact your local Dow Corning sales office or your Global Dow Corning Connection before writing specifications on this product.

Property	Unit	Result
Silicone Content	%	100
Appearance		Clear liquid
Viscosity	mm ² /s	250–500
Refractive Index (21°C)		1.41–1.42
Specific Gravity at 25°C (77°F)		0.98

DESCRIPTION

Dow Corning[®] CB-3046 Fluid is an optimized blend of silicones specifically developed to provide superior frizz control performance (Figure 1) and improved style ability. It has been designed for leave-in conditioners such as creams, lotions, cuticle coats, pomades and non-aerosol sprays.

HOW TO USE

Dow Corning CB-3046 Fluid can be added to the oil phase of the formulation. It is easy to emulsify with standard emulsifiers by common techniques. Recommended use levels for hair care leave-on products are 5% to 15%. Table 1 provides further information on compatibility of *Dow Corning* CB-3046 Fluid with other commonly used personal care ingredients.

Prototype formulations are available upon request.

HANDLING PRECAUTIONS

Dow Corning CB-3046 Fluid is not harmful by inhalation in a non-aerosolized form. It is not recommended for use in aerosol applications. Please refer to the linked [Aerosol Guidance](#) document, published by Silicones Environmental, Health, and Safety Center (SEHSC).

**PRODUCT SAFETY
INFORMATION REQUIRED FOR
SAFE USE IS NOT INCLUDED IN
THIS DOCUMENT. BEFORE
HANDLING, READ PRODUCT
AND MATERIAL SAFETY DATA
SHEETS AND CONTAINER
LABELS FOR SAFE USE,
PHYSICAL AND HEALTH**

HAZARD INFORMATION. THE MATERIAL SAFETY DATA SHEET IS AVAILABLE ON THE DOW CORNING WEBSITE AT DOWCORNING.COM, OR FROM YOUR DOW CORNING SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CORNING CUSTOMER SERVICE.

USABLE LIFE AND STORAGE

When stored between -18°C (-0.4°F) and 40°C (104°F) in original, unopened container this product has a usable life of a minimum 24 months from the date of production.

PACKAGING INFORMATION

This product is available in 20 kg pails and 200 kg drums. Samples are available in 500 ml bottles.

LIMITATIONS

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

HEALTH AND ENVIRONMENTAL INFORMATION

To support customers in their product safety needs, Dow Corning has an extensive Product Stewardship organization and a team of Product Safety and Regulatory Compliance (PS&RC) specialists available in each area.

For further information, please see our website, dowcorning.com or consult your local Dow Corning representative.

LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to

ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.



TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.

DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.

We help you invent the future.™

dowcorning.com

Figure 1: Frizz Control at 80% Relative Humidity, 25°C.

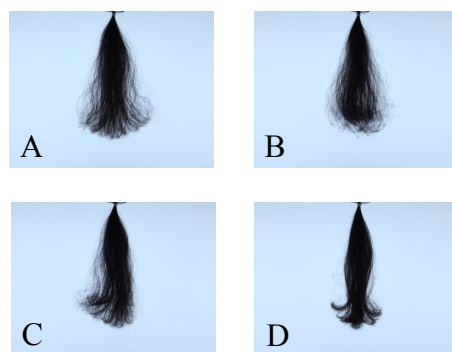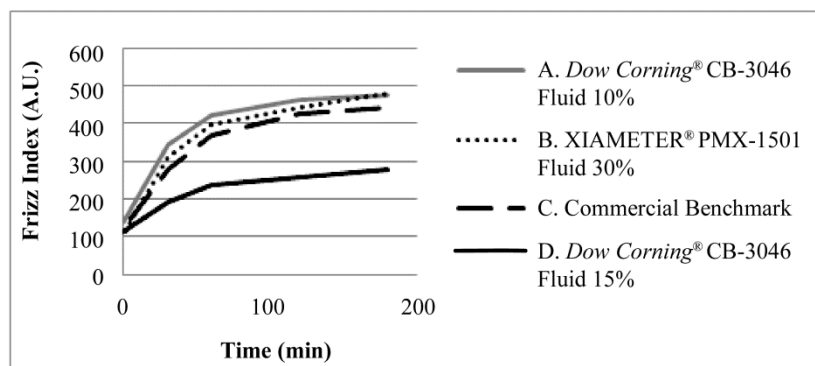

Significant difference (99.9% confidence) between Dow Corning CB-3046 Fluid at 15% and the other three products.

Table 1: Compatibility chart. Ratios are shown in the format “Other materials:Dow Corning CB-3046 Fluid”.

INCI Name	1:9	5:5	9:1
Water	NC	NC	NC
Glycerin	NC	NC	NC
Ethanol	NC	NC	NC
Isopropyl Alcohol	NC	NC	NC
Fatty alcohols:			
Cetearyl Alcohol	C	C	C
Cetyl alcohol	C	NC	NC
Stearyl Alcohol	NC	NC	NC
Vegetable oils:			
Argan Oil	NC	NC	NC
Sunflower Oil	NC	NC	NC
Coconut Oil	NC	NC	NC
Esters:			
Isopropyl Myristate	C	C	C
Hydrocarbons:			
Mineral Oil	C	C	NC
Dow Corning materials:			
Dimethicone, 5 cSt	C	C	C
Dimethicone, 500 cSt	C	C	C
Dimethicone, 60 000 cSt	C	C	C
Dimethicone, 300 000 cSt	C	C	C
Cyclopentasiloxane	C	C	C
Cyclopentasiloxane (and) Dimethiconol	C	C	C
Dimethicone (and) Dimethiconol	C	C	C
Amodimethicone	C	C	C
Bis (C13-15 Alkoxy) PG Amodimethicone	NC	NC	NC
Bis-Hydroxy/Methoxy Amodimethicone	C	C	C
Phenyl Trimethicone	C	C	C

C= compatible, NC= not compatible